

Tactical Camping Light

FMA[®]

TB1492



产品介绍/Product Introduction

TB1492战术露营灯配备了最新款LED灯光，搭配TPE材质可折叠柔光罩，能够提供均匀且柔和的光线。4个可折叠的战术支架，能支持多种固定方式，以适应不同的使用场景。折叠支架和柔光罩后，可使露营灯体积缩减一半，大大提高了便携性。在取下柔光罩后，露营灯可作射灯使用。其触控操作面板设计的开关，提供了白光、白光闪烁、红光、红光闪烁四种模式，并允许用户调整长亮白光的亮度。充电仓采用最新type-c接口，并配备防水密封盖，使得机身防水性能可达IPX5级别。

The TB1492 tactical camping light is equipped with the latest LED lights and a foldable TPE diffuser to provide uniform and soft light. The four foldable tactical brackets can support a variety of fixing methods to adapt to different usage scenarios. After folding the bracket and diffuser, the size of the camping light can be reduced by half, greatly improving portability. After removing the diffuser, the camping light can be used as a spotlight. The switch with a touch-operated panel design provides four modes: white light, flashing white light, red light, and flashing red light, and allows users to adjust the brightness of the long-bright white light. The charging compartment uses the latest type-c interface and is equipped with a waterproof sealing cover, making the body waterproof up to IPX5 level.

使用说明/Instructions

功能档（触摸模式）：触摸板向右划，分别为白光长亮、白光闪烁、红光长亮、红光闪烁。触摸板向左划为关机；开机长按触摸板中间为渐进式可调光。关机长按触摸板中间为电量提示，红灯连闪四次（1次代表25%电量）。

Function gear (touch mode): swipe the touchpad to the right to switch between long white light, flashing white light, long red light, and flashing red light; swipe the touchpad to the left to shut down the device; long press the middle of the touchpad to turn on the device for progressive dimming; long press the middle of the touchpad to shut down the device for battery level indication, with the red light flashing four times in a row (one time represents 25% battery level).

参数信息/Parameter information

红光高亮续航 Red light high brightness battery life	22H	LED高亮续航 LED high brightness battery life	10H
LED照明 LED lighting	Max:50LM		
荧光功能 Fluorescence function	夜视绿光8分钟 Night Vision Green Light 8 Minutes		
充电时间 Charging time	Max:2.5H		
充电输入 Charging Input	5V/2A.TYPE-C接口 5V/2A.TYPE-C interface		
工作温度 Operating temperature	-20°C ~ 40°C		
储存温度 Storage temperature	-20°C ~ 50°C		
材料 Material	PC+TPE 萤光灯罩 PC+TPE fluorescent lampshade		
重量 weight	178g		
防水等级 Waterproof grade	IPX5		
尺寸 size	收纳尺寸:70*110mm, 工作尺寸:142*126mm Storage size: 70*110mm working size: 142*126mm		


按键说明/Features and controls

金属选挂钩
Metal hook


可折叠固定支架
Foldable fixed bracket

可折叠的柔光罩
Foldable diffuser


功能档 (触摸模式)
Function mode (touch mode)

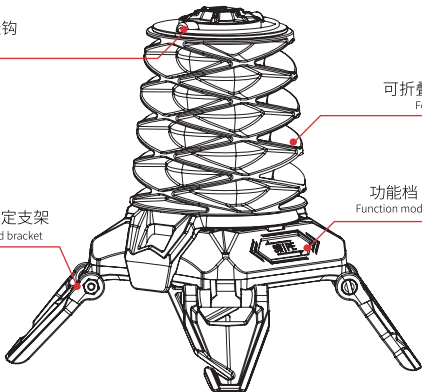


折叠柔光罩安装演示/Folding Diffuser Installation Demonstration

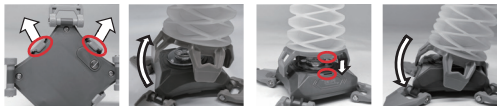

露营灯充电演示/Camping Light Charging Demonstration

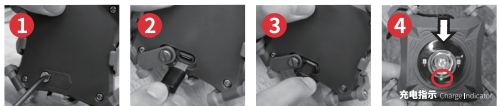

柔光罩折叠演示/Folding demonstration of diffuser

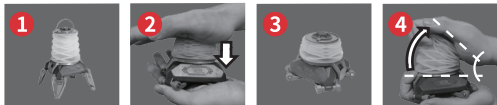

FMA[®]

FMA.HK

Address: Zhuhai, Guangdong, China

ZHUHAI TARGET ONE ELECTRONIC SCIENCE AND TECHNOLOGY
CO.,LTD.

合格证
CERTIFICATE

检验员

CHECKER: _____

出厂日期

DATE: _____